

INVERTER - 6N

NAALIM 6N



INPUT VOLTAGE : 110 OR 220 VAC

INPUT FREQUENCY : 50 / 60 Hz

OUTPUT VOLTAGE : 100 TO 280 VAC

OUTPUT CURRENT : 250 mA max


OUTPUT FREQUENCY : 650 Hz

LIGHTING AREA : 645 TO 3 900 cm²

MAX CONSUMPTION : 30 W

Kg 1.1

For detailed installation instructions, please consult the manual.

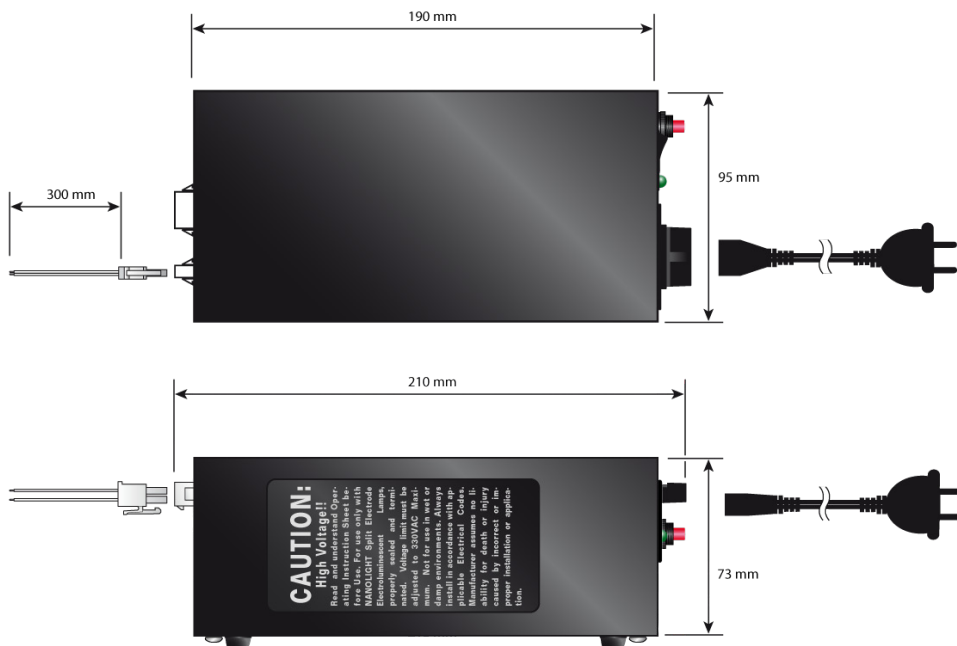

NANOLIGHT

4 rue Mugnier - 78600 Maisons-Laffitte - France
Phone: +33 (0)1 39 12 18 48 / Fax: +33 (0)9 57 74 41 26
contact@nanolight.fr - www.nanolight.fr