


INVERTER - PSN125

NAPSN125

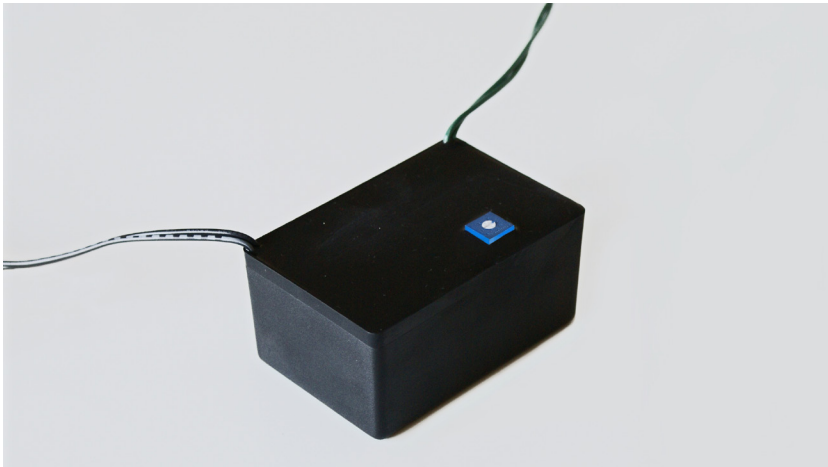

INPUT VOLTAGE : 12 OR 24 VDC

INPUT FREQUENCY : 50 / 60 Hz

OUTPUT VOLTAGE : 100 TO 280 VAC

OUTPUT CURRENT : 800 mA max


OUTPUT FREQUENCY : 650 Hz

LIGHTING AREA : 96 TO 806 cm²

MAX CONSUMPTION : 9.6 W (12 VDC) / 19.2 W (24 VDC)

Kg 0.37

For detailed installation instructions, please consult the manual.

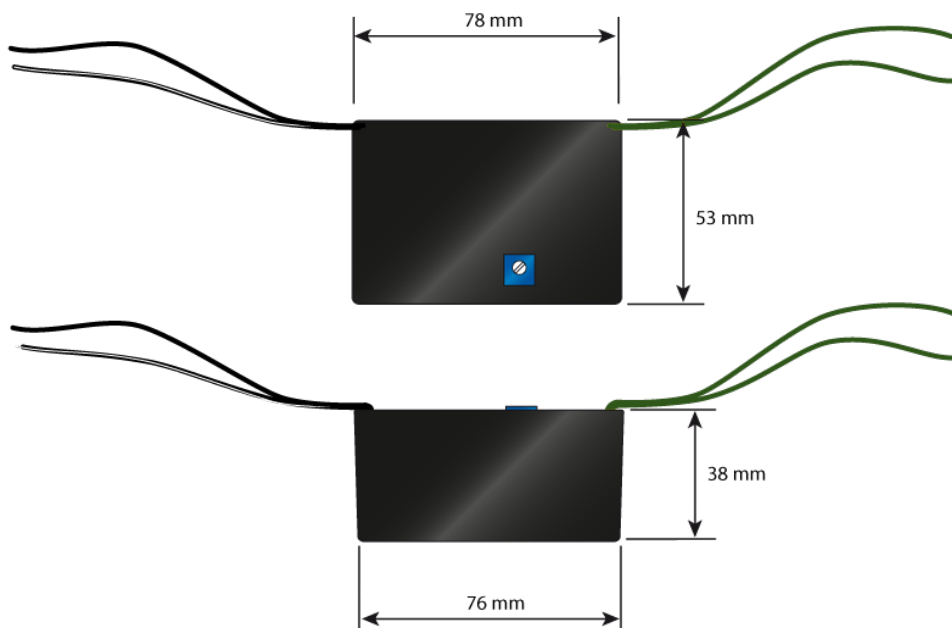

NANOLIGHT

4 rue Mugnier - 78600 Maisons-Laffitte - France
Phone: +33 (0)1 39 12 18 48 / Fax: +33 (0)9 57 74 41 26
contact@nanolight.fr - www.nanolight.fr